

### PRODUCT CODES

DCM-WP-B35, Roll  
DCM-WP-IC, 2x Inside Corners  
DCM-WP-OC, 2x Outside Corners


### PRODUCT DESCRIPTION

Warmup's 3-ply waterproof membrane products protect floors and walls under thin-set tile installations from substrate cracks and moisture migration. It is comprised of 2 outer polypropylene layers and one inner polyethylene waterproofing membrane and exceeds testing requirements per ASTM 118.10. The range is comprised of a 35ft roll of 5"-wide membrane, along with outer corners and inside corners.



### DIMENSIONS

Roll	35' x 5"
Inside corner (2/pack)	115 mm x 115 mm
Outside corner (2/pack)	105 mm x 105 mm

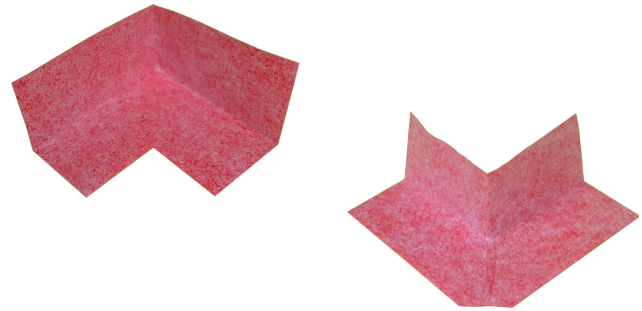

### APPLICATION

Warmup's waterproof membrane is recommended in wet areas such as bathrooms and showers and is designed to be used in conjunction with the DCM series of Warmup membranes and heating systems (DCM-PRO).

- Apply on substrates prepared for tile floors.
- Suitable for bathrooms, kitchens, showers and wet rooms in residential and commercial environments.
- Suitable for exterior applications on balconies and terraces.
- Can meet requirements of high moisture stress classifications (swimming pools) with appropriate sealants.

### STORAGE

Store in cool and dry place, protect against sunlight, use within 24 months of receipt.

### INSTALLATION

Apply the membrane per installation instructions. If desired, corners and wall-to-floor connections can be covered with the band and corners prior to laying the membrane. Apply all DCM Waterproofing products with modified thinset. Alternatively, install membrane first, then bend the DCM Tape band along the wall edge to waterproof the seams. Use inside/outside corners where necessary. Push tape in place with float or flat trowel. Finally, apply the DCM tape with thinset on top of the seams in the DCM membrane (where rolls/sheets meet).

For applications in showers, refer to local code requirements.

### TECHNICAL SPECIFICATIONS

Temperature resistance	-22F/-30C to +194F/90C
Thickness	0.5 mm
Weight	.2 lbs/sqft, 307 grams/meter
Bonding Strength	0.2N/mm <sup>2</sup>
Fire Classification	B2

### WARRANTY

When installed according to the installation manual, the DCM-WP range is covered with Warmup's 5-year manufacturer warranty.

### TECHNICAL SUPPORT

Warmup is available 24/7/365 at (888) 927-6333.  
For quotes, layouts and specific technical information, contact us at:

**Warmup USA**  
(888) 927-6333  
us@warmup.com

**Warmup CANADA**  
(888)592-7687

### RELATED PRODUCTS

- DCM-PSW-80 and DCM-PSW-150, WSC-1001
- DCM-MW-80 and DCM-MW-150, WSC-1026
- DCM-PRO Cables (DCM-C Series), WSC-0816