


Proposed FFL

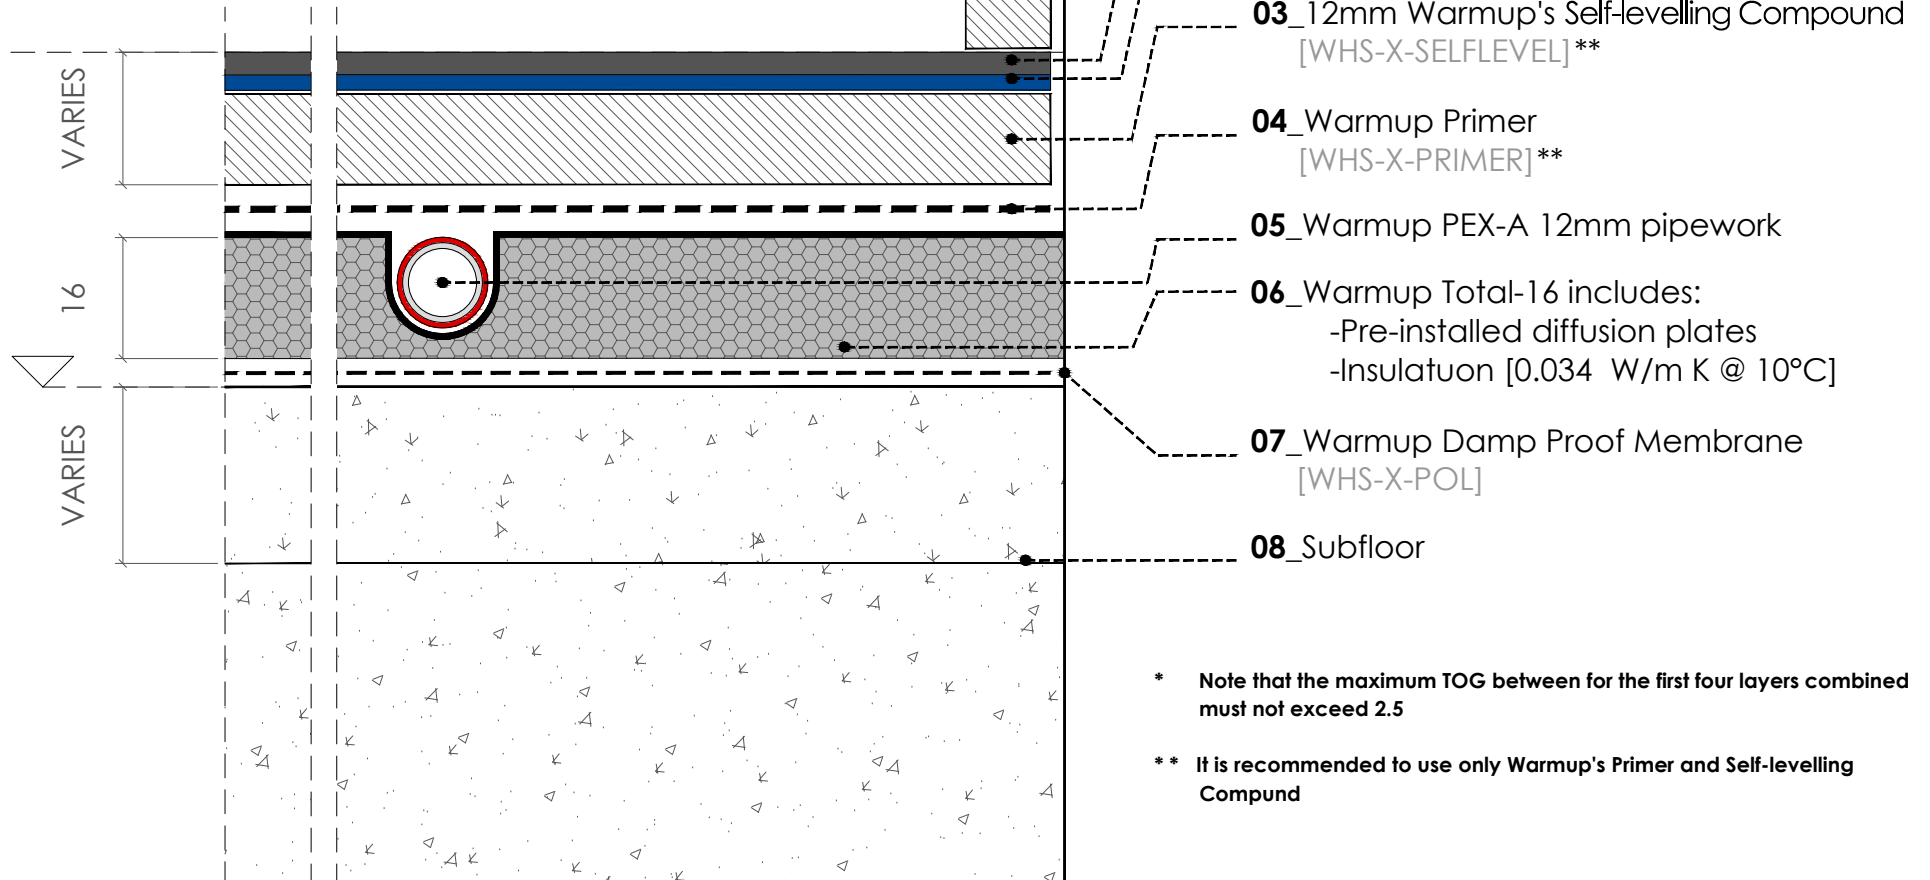

- * Note that the maximum TOG between for the first four layers combined must not exceed 2.5
- ** It is recommended to use only Warmup's Primer and Self-levelling Compund

Warmup

The world's best-selling floor heating brand™

WARMUP PLC, 702 Tudor Estate, Abbey Road, London, NW10 7UW
Tel 0845 034 8270 Fax 0208 453 6869
projects@warmup.com www.warmup.co.uk

© This drawing is confidential and may not be used, copied or disclosed to anyone without permission of Warmup Plc. The Copyright of these drawings remain the property of Warmup Plc. Do not scale from drawings, all dimensions to be checked on site. The Warmup word and associated logos are trade marks. © Warmup Plc. 2010 - Regd. TM Nos. 1257757, 4409926, 5265707, E & OE. Registered in England No. 2955213.

TITLE: TOTAL-16_Carpet [using Warmup's Self-levelling]

SCALE: 1:1_A4 DATE: 10.06.2015

DESIGNER: ALBERTO A VERSION: 03