


### PRODUCT CODES

ODC-GF-1

ODC-GF-2

### PRODUCT DESCRIPTION

Electric snow melting and outdoor pipe heating systems installed in the United States and Canada require ground fault protection for safe operation. The ODC-GF-1/ODC-GF-2 Ground Fault Protection Units can be used to meet the NEC 426.28/427.22 and CEC Part I, Rule 62-300 requirements for ground fault protection for equipment. The ODC-GF-1 provides single circuit protection and the ODC-GF-2 provides dual circuit protection. The unit is housed in a rugged IP65 NEMA 4X rated enclosure suitable for either indoor or outdoor installation. The GF unit should be installed between the overload-protected branch circuit and the snow melt/heat trace control and heating equipment. The GF unit only provides ground fault protection and must be used with Primary Overload protection. Do not exceed 63 amps.

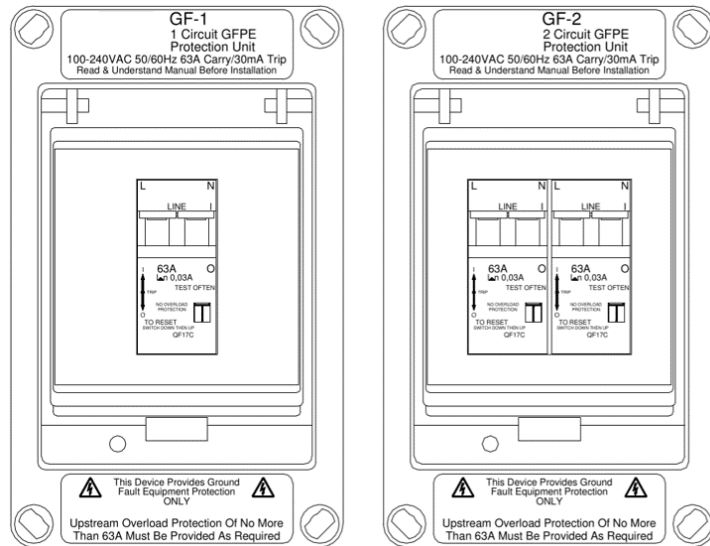

### SPECIFICATIONS

- Input: 100-240 VAC, 50/60 Hz
- NEMA4X enclosure
- Suitable with #14-#6 wire only


### CAPACITY

- 63A Carry/22mA Ground Fault Trip


### OPERATING TEMP

- -40°C to +60°C

### TYPICAL WIRING

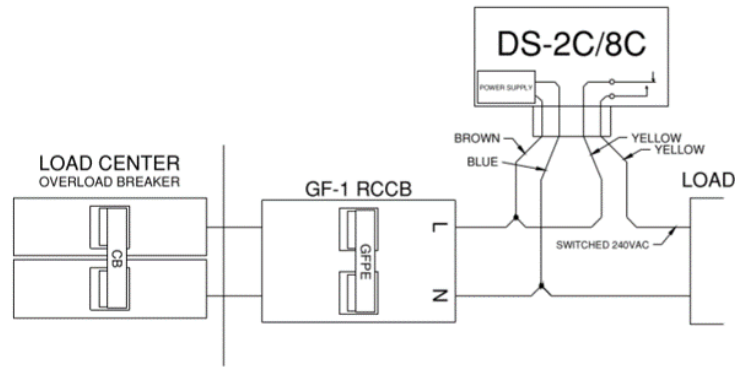

Single Circuit GF-1 240VAC Feed

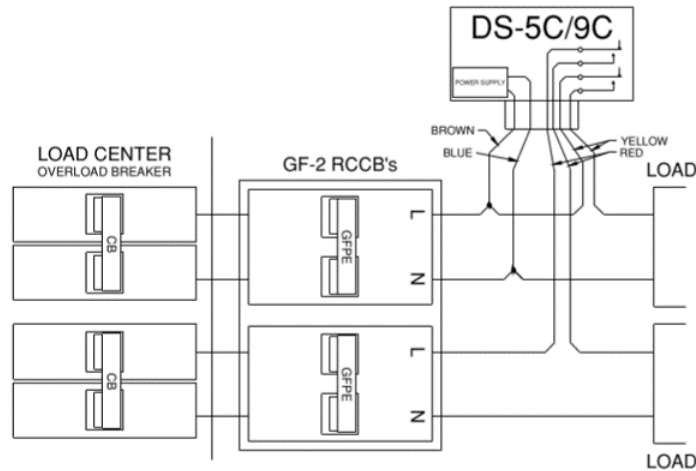

Dual Circuit GF-2 240VAC Feed