

PRODUCT CODES


- RFT-P-WH

PRODUCT DESCRIPTION

The RFT is a basic programmable thermostat with an attractive touch screen display. The unit has a 15 amp switching capacity for 120V or 240V systems.

SPECIFICATIONS

Screen	4" Capacitive Touch Glass
Voltage	85-265Vac 50/60Hz
Current	Max 15A (resistive load)
GFCI	Class A (5 mA trip level)
Set temp	5-40°C / 41-104°F
Display temp	5-45°C / 41-113°F
Floor limit temp	5-45°C / 41-113°F
Peak voltage	2500V(impulse)
Sensor	NTV (10KΩ-B3950) 10 ft
Connection	Pigtail
Accreditation	ETL (tested to updated UL specifications)

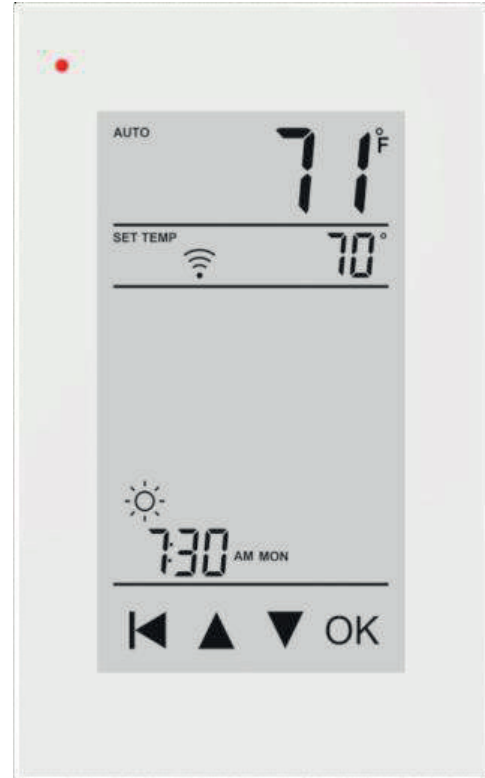

Weekly Schedule	7 days/5+1+1 four event
Adaptive function	Yes
Child lock	Yes
Temp unit	°C / °F
Sensor Type	Floor/ Air
On-site calibration	Yes
Sensors	Room/Floor/Both



PRODUCT LISTING

Code	Description	Amp (A)
RFT-P-WH	Warmup RFT programmable Thermostat, Portrait, 120V/240V with sensor probe and Class A GFCI, white	15A
SENSOR	Additional Floor Sensor for the RFT Smart WiFi Thermostat	N/A
RELAY-25	General purpose 25A/240V relay used to expand the switching capability of the Warmup thermostats. Mounts in a single gang box.	25A/240V

WARRANTY & MAINTENANCE

When installed according to the installation manual, the RFT thermostat is covered with Warmup's 3-year manufacturer warranty. The system requires no maintenance. All Warmup controls are protected by Warmup's SafetyNET Guarantee.

TECHNICAL SUPPORT

Warmup is available 24/7/365 at (888) 927-6333.

For quotes, layouts and specific technical information, contact us at:

Warmup USA

+1 (888) 927-6333
us@warmup.com

Warmup CANADA

+1 (888) 592-7687
ca@warmup.com

RELATED PRODUCTS

- DCM-PRO - see WSC-0816
- DWM - see WSC-0720
- FOIL - see WSC-0723
- WODH - see WSC-0724
- RELAY-25 - see WSC-1116