




The world's **best-selling** floor heating brand™

## 7iE SMART MATTER THERMOSTAT SUBMITTAL SHEET

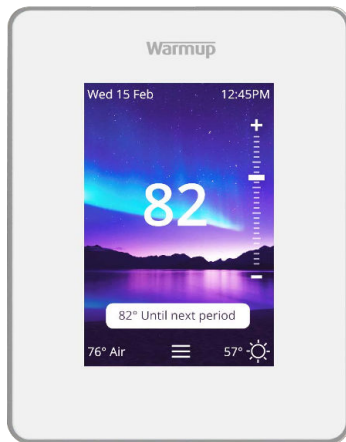

### PROVIDES SMARTER ENERGY SAVINGS

Automatically adjusts your heating to maximize comfort and efficiency.

### EFFORTLESS SMART HOME INTEGRATION

Compatible with Apple, Google, and Amazon devices through its Matter Technology.

### EXPERT HEATING SUPPORT

Facilitates proactive system monitoring and remote support through its access to Smartcare.

## OVERVIEW

The 7iE from Warmup features advanced Matter Technology to seamlessly integrate your heating within your Smart Home Ecosystem. Available in Cloud White with an ultra-thin (16 mm from the wall) design, it will look great in classic contemporary or simple modern homes and personalize the 7iE with custom photo backgrounds.

Set up is done in a matter of seconds, simply scan the QR code which will appear on the 7iE using the MyHeating app and it will automatically connect to your WiFi network.

The 7iE works with all of our advanced energy saving features in the MyHeating app such as SmartGeo. SmartGeo is a unique technology developed by Warmup and built into the MyHeating App that uses an advanced algorithm to understand the most efficient heat settings for your home.

Working automatically, it learns your routines and location through background communication with your smartphone and lowers temperatures when you are away, only rising them up to your ideal comfort temperature in time for your arrival home, saving you money and energy.



**Warmup Inc.**  
25-A Francis Clarke  
Circle, Bethel,  
CT 06801

W: [www.warmup.com](http://www.warmup.com)  
E: [us@warmup.com](mailto:us@warmup.com)  
T: (888) 927-6333  
F: (888) 927-4721

**Warmup Canada**  
E: [ca@warmup.com](mailto:ca@warmup.com)  
T: (888) 592-7687  
F: (888) 927-4721



The world's **best-selling** floor heating brand™




The world's **best-selling** floor heating brand™

## 7iE SMART MATTER THERMOSTAT SUBMITTAL SHEET

### FEATURES & BENEFITS

- ❑ Premium ultra-thin design with a smartphone touchscreen providing **effortless control** at your fingertips.
- ❑ **Personalize** the 7iE with photo backgrounds, the only underfloor heating thermostat with this ability.
- ❑ **Easy to setup.** Simply scan the QR code which will appear on the 7iE using the MyHeating app and it will automatically connect to your WiFi network.
- ❑ Automatic control of your heating. SmartGeo learns your routines and location through background communication with your smartphone and lowers temperatures when you are away, only rising them up to your ideal comfort temperature in time for your arrival home **saving you money and energy.**
- ❑ **Reduce energy use by up to 25%** with energy efficient MyHeating app technology.
- ❑ Weather based Early Start. Turns the heating on at just the right time to be warm when you scheduled - **no overheating or wasted energy.** Takes into account the weather forecast for warmth just when you wanted, even on cold days and no wasted energy overheating on warm days.
- ❑ Enjoy intuitive warmth through the use of any Matter-connected device in your home including Apple Home, Google Home, and Amazon Alexa. Control your heating with the sound of your voice or set up simple routines from one universal platform.
- ❑ **12 Year warranty** when installed with a Warmup heater.

### 7iE PRODUCT CODE

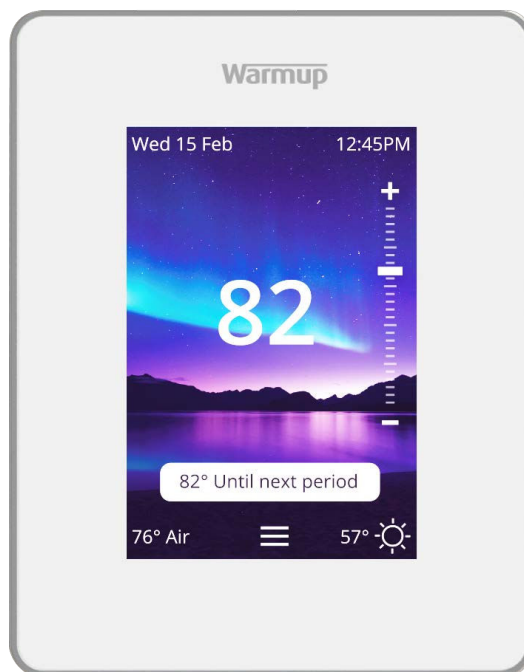

Model	Housing Color	Band
7iE-04-CW-LC	Cloud White	Light Chrome

**Warmup Inc.**  
25-A Francis Clarke  
Circle, Bethel,  
CT 06801

W: [www.warmup.com](http://www.warmup.com)  
E: [us@warmup.com](mailto:us@warmup.com)  
T: (888) 927-6333  
F: (888) 927-4721

**Warmup Canada**  
E: [ca@warmup.com](mailto:ca@warmup.com)  
T: (888) 592-7687  
F: (888) 927-4721



The world's **best-selling** floor heating brand™

### PACK CONTENTS




1 x 7iE (Display & Power Base)  
with installation manual

1 x 10ft NTC10K Sensor

Screws

### DIMENSIONS

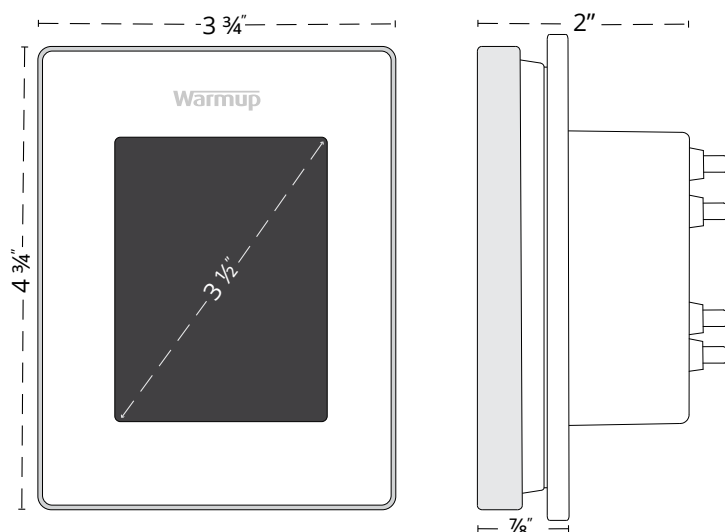

### TECHNICAL SPECIFICATIONS

Model	7iE-XX-YY-ZZ	Max. Ambient Temperature	40°C / 104°F (T40)
Voltage	110V - 240V AC +/-15% 50Hz/60Hz	Relative Humidity	80 %
Protection	II	IP Rating	IP30
Pollution Degree	2	Sensors	Floor/Air
GFCI	Class A GFCI with 5mA trip level	Sensor Type	NTC10K @ 25°C
Rated Impulse Voltage	4000V	Operating Frequency	2401 - 2484MHz
Automatic Action	100,000	Max. Radio-Frequency Power Transmitted	20dBm
Disconnection Means	1B	Compatibility	Electric Floor Heating and Baseboard Heating
Maximum Load	15A resistive (120 V/1800W, 240 V/3600W)	Standards	UL-60730-1 UL-60730-2-9 UL-943 CAN/CSA-E60730-1 CAN/CSA-E60730-2-9 CAN/CSA-C22.2 No. 144.1 FCC 47 CFR Part 15, ICES-003