


# Downspout Hanger [SR-HANGER-KIT]

For use with Warmup WSR Self-Regulating Cable  
[Non-hazardous Locations]

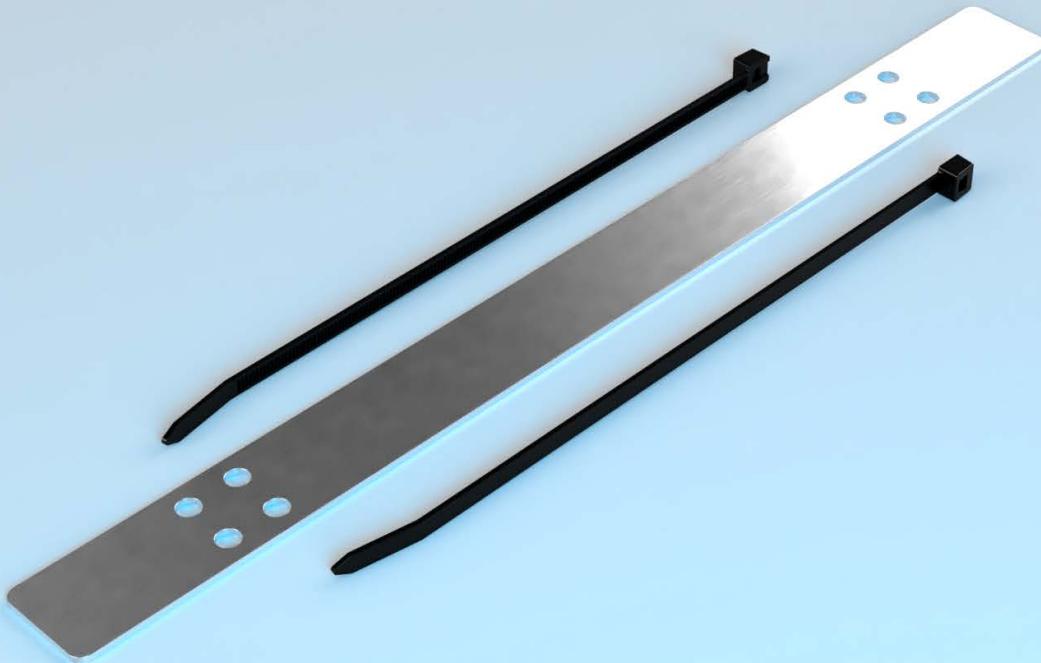

## Secure Cable Fastening

Designed specifically to hold Warmup's WSR Self-Regulating Cable firmly in place at the top of downspouts using supplied zip ties.

## Mechanical Protection

Downspout Hangers protect Warmup's WSR Self-Regulating Cable from sharp edges, preventing cable damage.

## Durable Construction

Made from robust aluminium to withstand outdoor conditions, ensuring long-term reliability in harsh weather.

## cCSAus Certified

Guarantees compliance when used with WSR cable.


## Overview

Warmup's Downspout Hangers are used to provide mechanical protection to Warmup's WSR Self-Regulating Cable as it traverses over sharp edges and also to hold the cable in place at the top of downspouts in roof & gutter applications.

The Downspout Hangers are secured to the WSR cables using the supplied zip ties. If required the Downspout hanger can also be used as a spacer when the WSR is installed in a gutter.

The Downspout Hanger Kit is cCSAus approved for non-hazardous locations only when used with Warmup's WSR Self-Regulating Cable. To maintain cCSAus compliance, only Warmup approved accessories may be used with WSR Self-Regulating Cable. Refer to the Part Numbers page for guidance.

# Dimensions

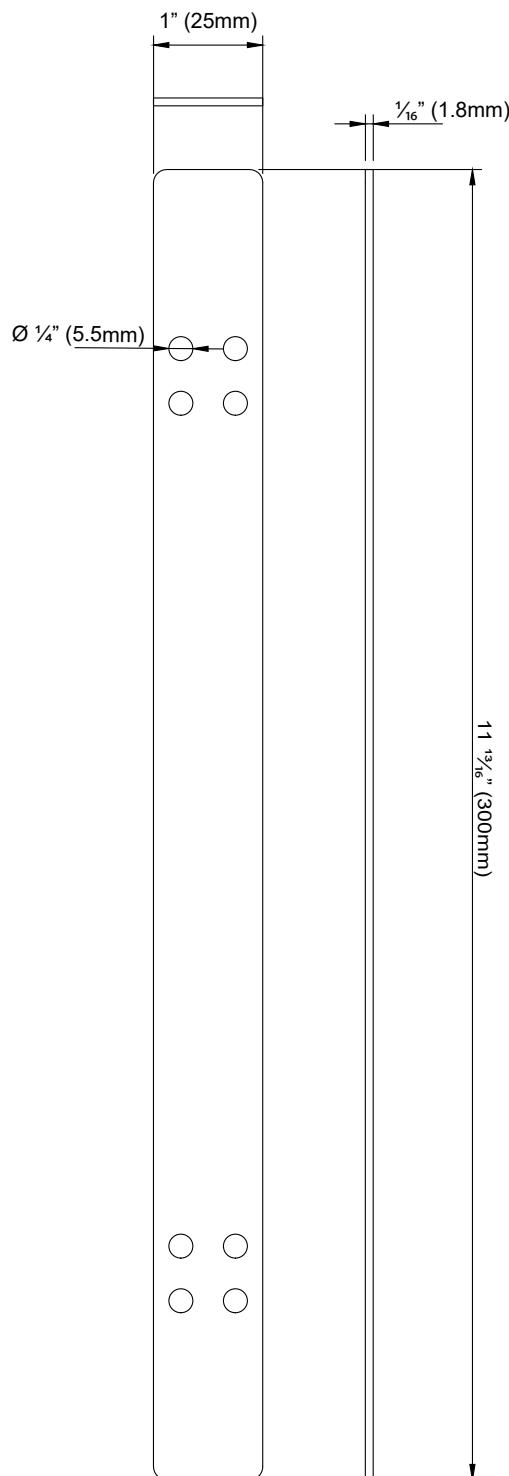

# Part Numbers

WSR Self-Regulating Cable					
Model	Code	Voltage	Cable Length	Power Output W/ft @ 10°C; (0°C Water)	
WSR-5W-1-250-CR	WSR-5/9W-1-250-CR	110-120 VAC	250 ft	5 W/ft (9 W/ft)	
WSR-5W-1-500-CR	WSR-5/9W-1-500-CR	110-120 VAC	500 ft	5 W/ft (9 W/ft)	
WSR-5W-1-1000-CR	WSR-5/9W-1-1000-CR	110-120 VAC	1000 ft	5 W/ft (9 W/ft)	
WSR-5W-2-250-CR	WSR-5/9W-2-250-CR	208-277 VAC	250 ft	5 W/ft (9 W/ft)	
WSR-5W-2-500-CR	WSR-5/9W-2-500-CR	208-277 VAC	500 ft	5 W/ft (9 W/ft)	
WSR-5W-2-1000-CR	WSR-5/9W-2-1000-CR	208-277 VAC	1000 ft	5 W/ft (9 W/ft)	
WSR-8W-1-250-CR	WSR-8/12W-1-250-CR	110-120 VAC	250 ft	8 W/ft (12 W/ft)	
WSR-8W-1-500-CR	WSR-8/12W-1-500-CR	110-120 VAC	500 ft	8 W/ft (12 W/ft)	
WSR-8W-1-1000-CR	WSR-8/12W-1-1000-CR	110-120 VAC	1000 ft	8 W/ft (12 W/ft)	
WSR-8W-2-250-CR	WSR-8/12W-2-250-CR	208-277 VAC	250 ft	8 W/ft (12 W/ft)	
WSR-8W-2-500-CR	WSR-8/12W-2-500-CR	208-277 VAC	500 ft	8 W/ft (12 W/ft)	
WSR-8W-2-1000-CR	WSR-8/12W-2-1000-CR	208-277 VAC	1000 ft	8 W/ft (12 W/ft)	
WSR-10W-1-250-CR	WSR-10/15W-1-250-CR	110-120 VAC	250 ft	10 W/ft (15 W/ft)	
WSR-10W-1-500-CR	WSR-10/15W-1-500-CR	110-120 VAC	500 ft	10 W/ft (15 W/ft)	
WSR-10W-1-1000-CR	WSR-10/15W-1-1000-CR	110-120 VAC	1000 ft	10 W/ft (15 W/ft)	
WSR-10W-2-250-CR	WSR-10/15W-2-250-CR	208-277 VAC	250 ft	10 W/ft (15 W/ft)	
WSR-10W-2-500-CR	WSR-10/15W-2-500-CR	208-277 VAC	500 ft	10 W/ft (15 W/ft)	
WSR-10W-2-1000-CR	WSR-10/15W-2-1000-CR	208-277 VAC	1000 ft	10 W/ft (15 W/ft)	
WSR Approved Accessories					
Model	Description	Classification	Application		
SR-SFIT-BOX-S	Power Connection Box for connecting WSR to supply	<b>Non-Hazardous &amp; Hazardous Locations</b> <i>Ex eb IIC T3 Gb, Ex tb IIIC T200°C Db Class I, Zone 1, AEx eb IIC T3 Gb Class II, Zone 21, AEx tb IIIC T200°C Db Class I, Division 2, Groups A, B, C and D T3 Class II, Division 2, Groups F, G T3</i>			
SR-SFIT-SPL	Splice Connection kit for In-line Splice of WSR cable	<i>Pipe Tracing Roof &amp; Gutter</i>			
SR-SFIT-TEE	Tee Splice Connection kit for Tee Splice of WSR cable				
SR-END-KIT	End-Seal Termination kit for WSR cable termination				
SR-LENDKAP	Lighted End Kit for WSR cable termination, giving visual indicator when WSR cable is active. <b>Certified for use at 120 or 240V AC only.</b>		<b>Non-Hazardous &amp; Hazardous Locations</b> <i>Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III; T5 or T6</i>		
SR-POWER-KIT	Power Connection Kit for WSR cable, incl. components for 1 power connection, 1 termination. Incl. 1 pipe standoff bracket.		<b>Non-Hazardous Locations</b>		
CRDS-15-GFCI	Plug-in, ground-fault-circuit interrupter [GFCI] power connection kit with 5-15P type plug for Warmup's WSR		<b>Non-Hazardous Locations</b>		
<b>120V Self-Regulating Cable</b>					
SR-SPLICER-KIT	Splice/Tee Kit for WSR cable. Incl. components for 1 Splice and 1 End Seal, or 1 Tee Connection and 1 End Seal		<b>Non-Hazardous Locations</b>		
SR-ROOF-CLIP(50/BAG)	Metal single roof clips (50/BAG) to secure WSR cable		<b>Non-Hazardous Locations</b>		
SR-HANGER-KIT	Downspout Hanger for WSR cable		<b>Non-Hazardous Locations</b>		

# Contact

Warmup is available 24/7/365 at (888) 927-6333  
For quotes, layouts and specific technical information contact us at:

## **Warmup Inc**

[www.warmup.com](http://www.warmup.com)  
[us@warmup.com](mailto:us@warmup.com)  
**T:** +1 (888) 927-6333

## **Warmup Canada**

[www.warmup.com](http://www.warmup.com)  
[ca@warmup.com](mailto:ca@warmup.com)  
**T:** 1+ (888) 592-7687

25 Francis J Clarke Cir, Bethel,  
CT 06801